



LOCUS NTS

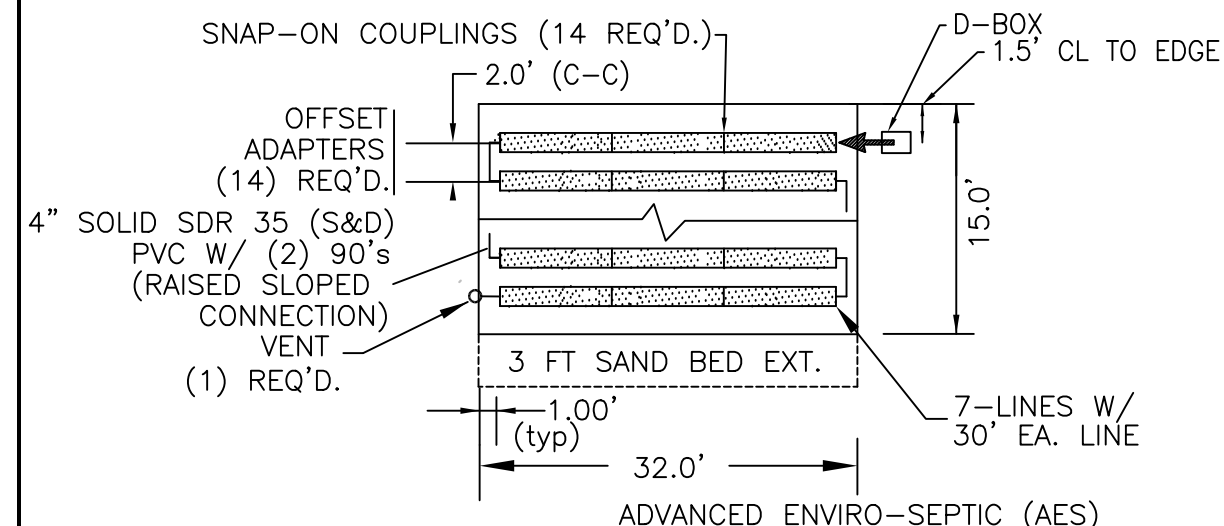


PARTIAL BED PLAN NTS

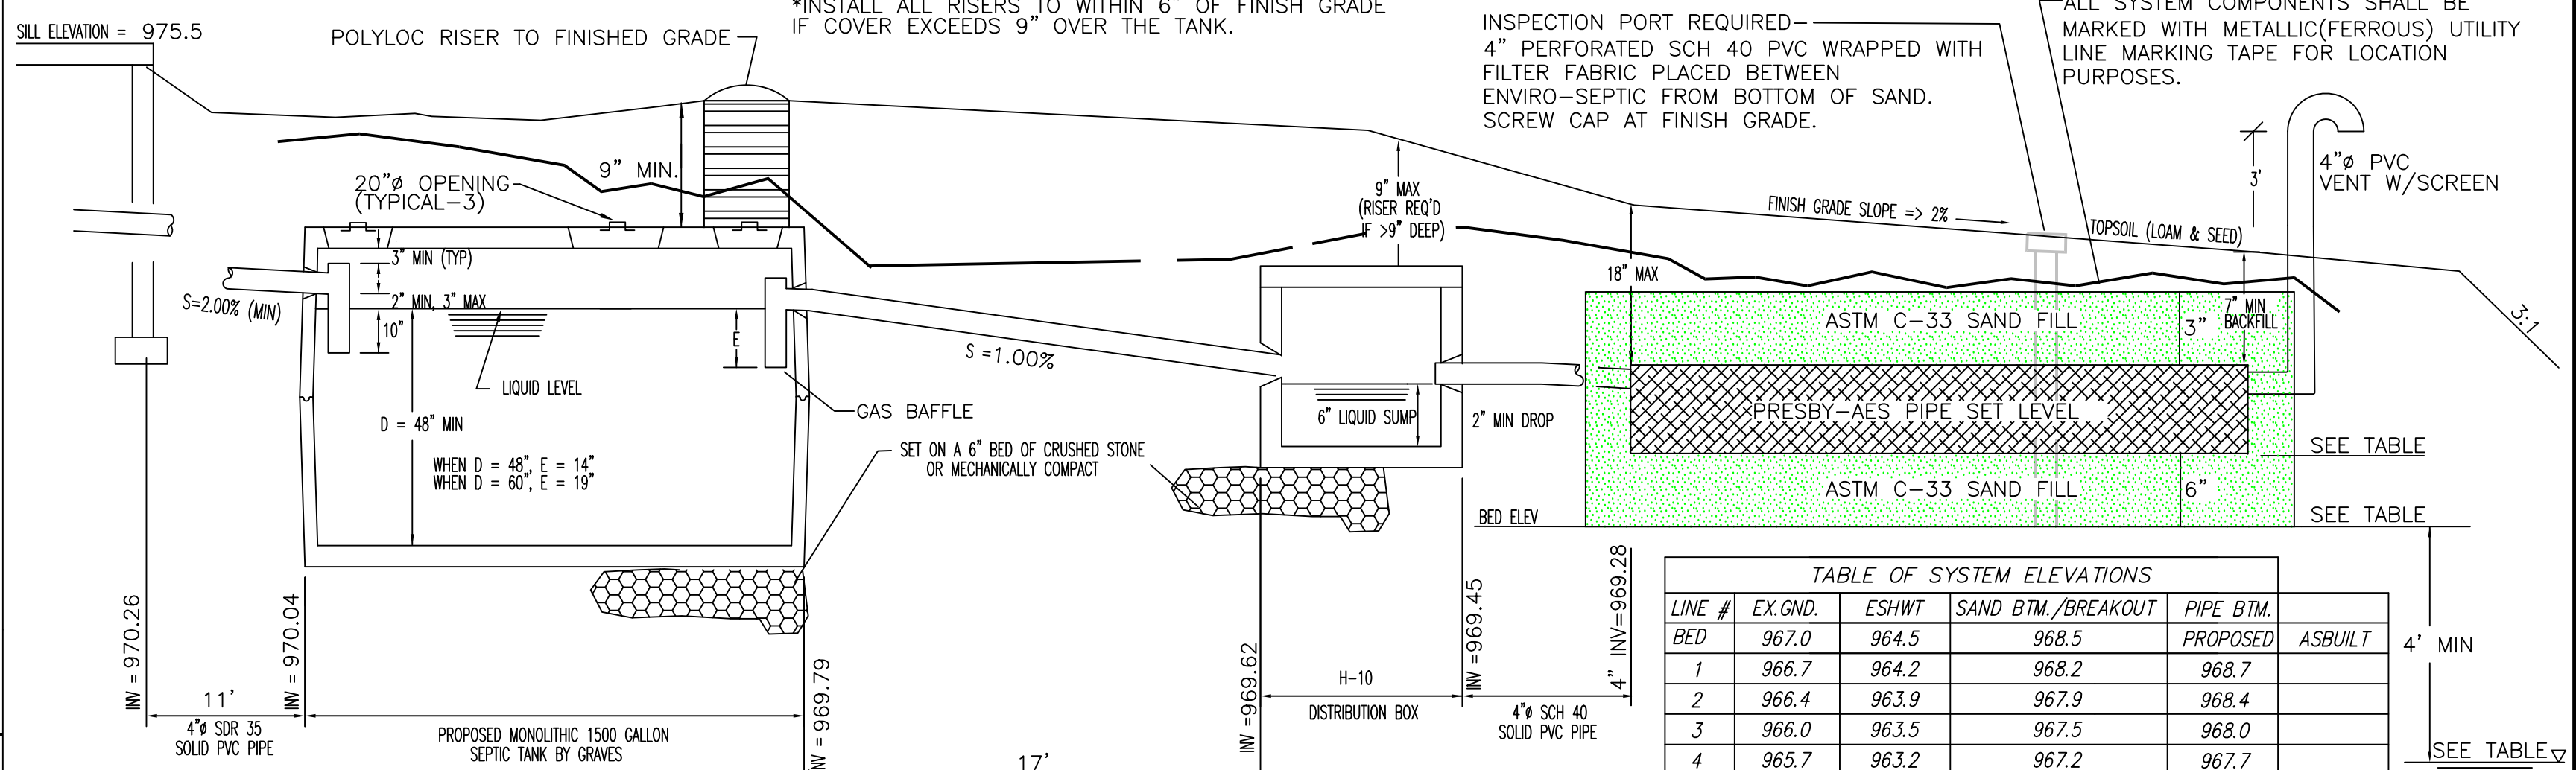

SCHEMATIC PROFILE NTS

TABLE OF SYSTEM ELEVATIONS


LINE #	EX.GND. BED	ESHWT	SAND BTM/BREAKOUT	PIPE BTM.	ASBUILT
1	967.0	964.5	968.5	968.7	
2	966.7	964.2	968.2	968.7	
3	966.4	963.9	967.9	968.4	
4	966.0	963.5	967.5	968.0	
5	965.7	963.2	967.2	967.7	
6	965.3	962.8	966.8	967.3	
7	965.0	962.5	966.5	967.0	
8	964.6	962.1	966.1	966.6	
9	964.3	961.8	965.8	966.3	

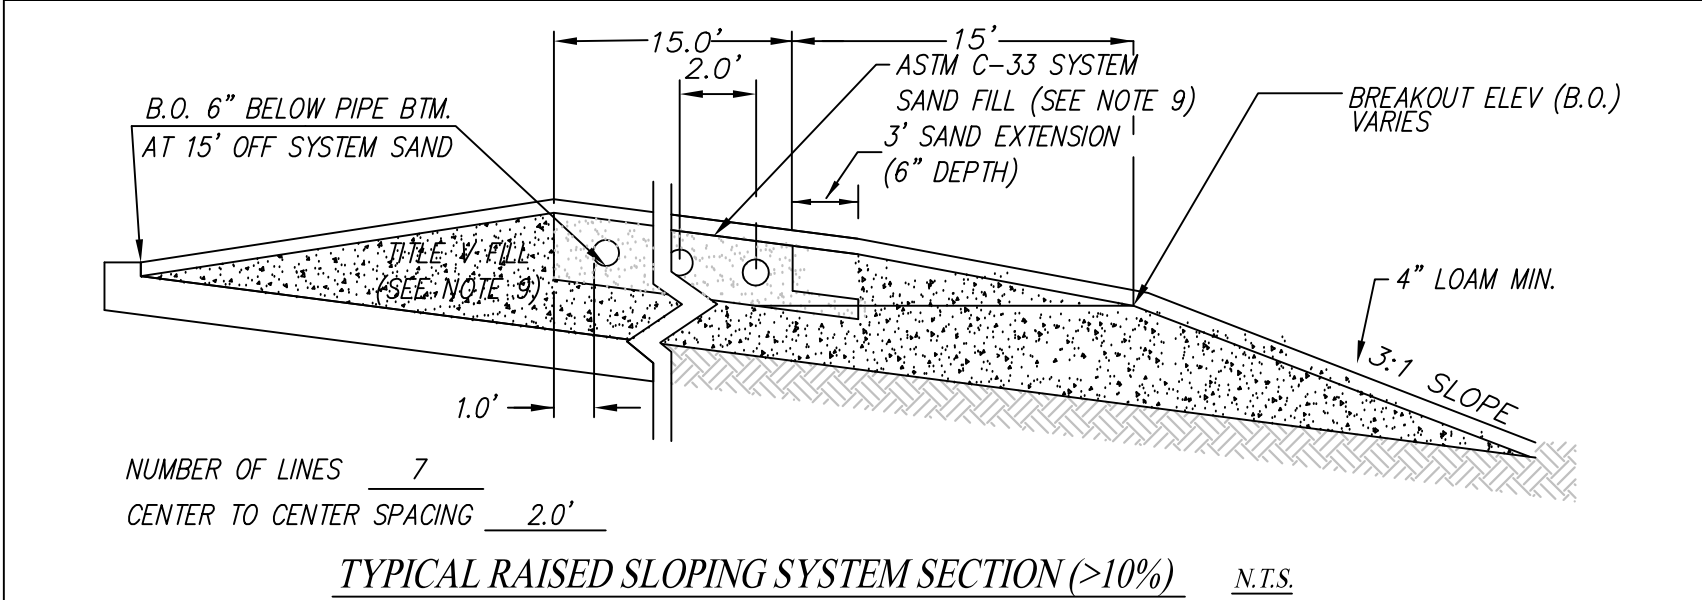

TYPICAL RAISED SLOPING SYSTEM SECTION (>10%) NTS

DESIGN CRITERIA

- Estimated Hydraulic Loading
3 bedrooms at 110 gals/day/bedroom = 330 gpd.
Garbage disposal shall not be allowed with this system.
- Septic tank size = 1,500 gallons
- Leaching Area Design Criteria
Percolation Rate = 10 mpi
Required linear feet of Presby AES pipe = 210 L.F.
Linear feet of Enviro-septic pipe provided = 210 L.F.
Square footage required by Title V = 330 GPD/0.6 = 550 S.F.
Square footage provided = 576 S.F.

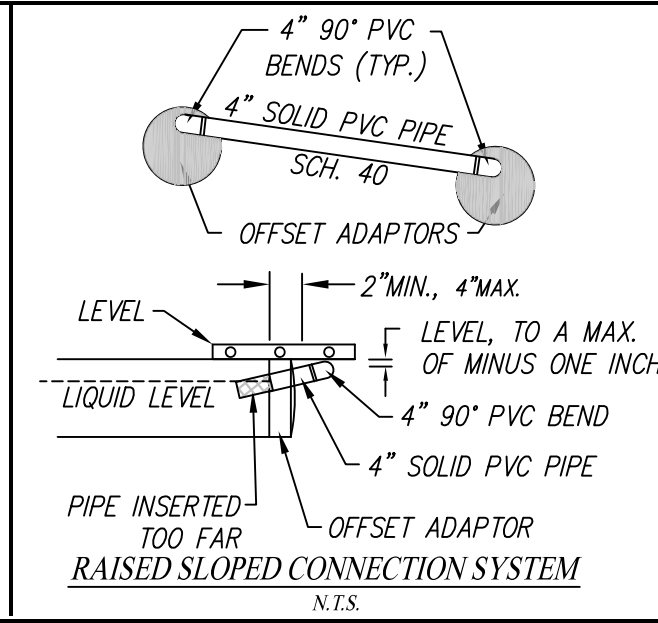

NOTES

- Unless otherwise noted, property lines shown are compiled from existing plans and/or deeds.
- Underground utility data is plotted from visible field locations and available records. The locations are approximate only and verification must be made in the field and Dig-Safe notified.
- All work shall be performed by a Licensed Installer and construction shall conform to the State of Massachusetts requirements as established in 310 CMR 15.00. Installation of the Presby AES leaching system shall conform to the Enviro-Septic Design and Installation Handbook. (ENVIRO-SEPTIC MASSACHUSETTS DESIGN AND INSTALLATION MANUAL)
- The contractor shall install the system exactly as shown on this plan. If changes are necessary, the contractor must contact the Engineer in advance.
- Heavy machinery shall not be permitted to pass over the leaching area.
- All piping shall be polyvinyl chloride (PVC) pipe per ASTM D1785 for sch.40 and ASTM D3034 for SDR 35 where indicated on the profile, unless otherwise noted. S&D pipe shall be SDR 35 PVC.
- Septic tank shall be a 1,500 gallon reinforced concrete tank by Graves Concrete (or equal).
- An H-10 load-rated distribution box (D-box) is required.
- All topsoil, roots and impervious material, if any, must be excavated and removed below the soil absorption system area (and the 3:1 fill slope). The natural soil shall be hand raked. The system sand (ASTM C-33) shall be used above, between, 12" beyond sides and 6" below the AES. The system sand shall meet ASTM C-33. The system installer shall provide the system owner and the local approving authority with a bill of lading certifying that the sand fill meets ASTM C-33.
- For proper performance, septic tank should be inspected at least once a year and pumped when the combined thickness of the sludge (bottom) and scum (surface) equals 1/3 or more of the tank depth.
- Refer to Massachusetts DEP I/A Approval & Presby Operation and Maintenance documents.
- Sand fill (except, for ASTM C-33 around Presby AES) shall be per title V, a clean granular sand, free from organic matter and deleterious substances. Mixtures and layers of different classes of soil not be used. The sand fill shall not contain any material larger than 2 inches. A sieve analysis, using a #4 sieve, shall be performed on a representative sample of the fill. Up to 45% by weight of the fill sample may be retained on the #4 sieve. Sieve analyses also shall be performed on the fraction of the fill sample passing the #4 sieve, such analyses must demonstrate that the material meets or exceeds each of the following specifications: 100% passing #4 sieve; 10%-100% passing #50 sieve; 0%-20% passing #100 sieve; 0%-5% passing #200 sieve. (11/95 DEP SPEC)
- ENVIRO-SEPTIC DESIGN CERTIFICATE NUMBER: 2488MAES
- The owner & designer must certify that the installation meets the DEP General Use Approval.
- No structures shall be placed on or near the reserve area.
- A conventional title-V system would consist of a 16' x 35' bed, resulting in 560 S.F. of leaching area.

SOIL TEST DATA

DEEP HOLE & PERC TESTS


PERFORMED BY: PAUL GRASEWICZ, P.E.
WITNESSED BY: JIM ABARE & STEVE CALICHMAN, B.O.H. WINCHENDON
DATE: JUNE 6, 2022

DEEP HOLE #	IP-1	IP-2	IP-3	IP-4
FINE SANDY LOAM 10YR 3/2	0"	0"	0"	0"
FINE SANDY LOAM 10YR 4/6	6"	10"	10"	10"
LOAMY SAND 2.5Y 5/6	16"	24"	22"	22"
COMPACT SAND 2.5Y 6/4 10% GRVL, 10% CBBL	26"	32"	30"	28"
	88"	82"	84"	85"



PERC TEST NUMBER	DEPTH	PERC RATE	NOTES
PERC-1	32"	10 MPI	
PERC-2	34"	4 MPI	

LEGEND

- 242 EXISTING CONTOUR
- 242 PROPOSED CONTOUR
- IP-1A DEEP HOLE TEST PIT
- P-1A PERCOLATION TEST
- + 238.6 SPOT ELEVATION
- IPF O IRON PIN FOUND
- BND O STONE BOUND FOUND
- EXISTING STONE WALL

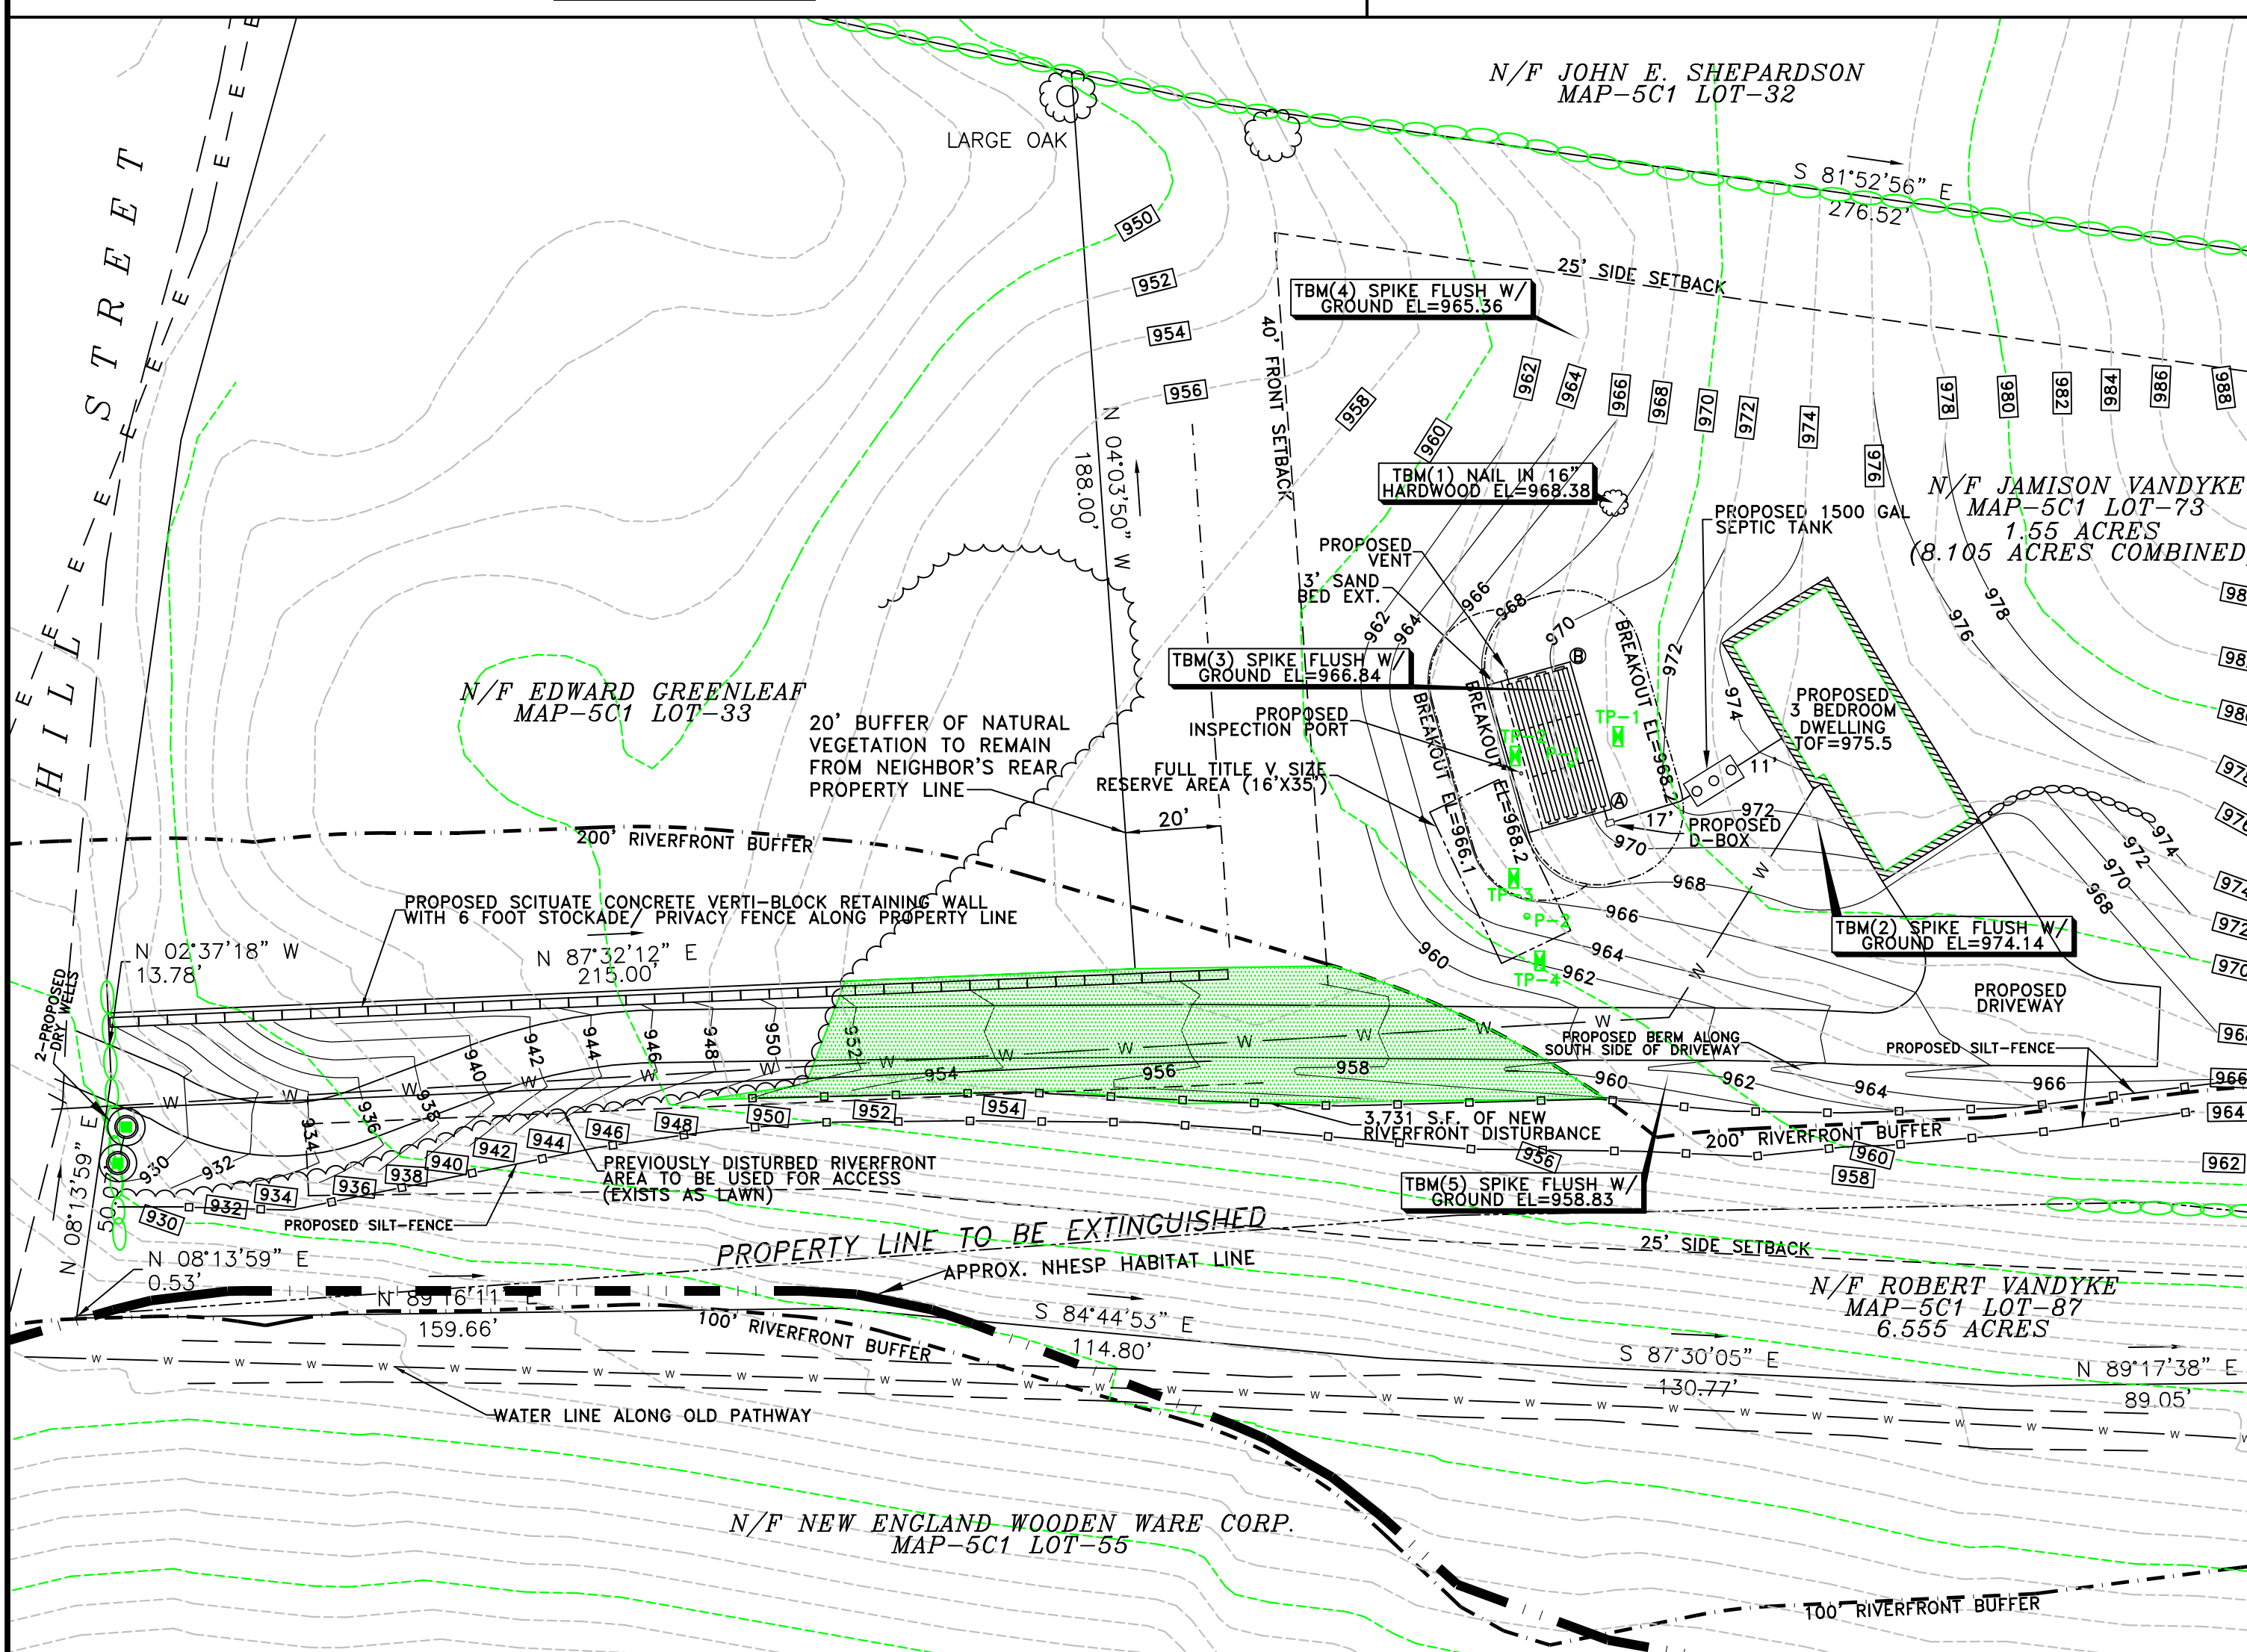


PLAN

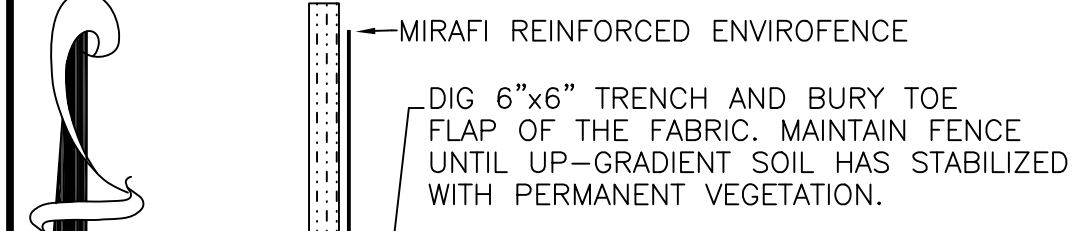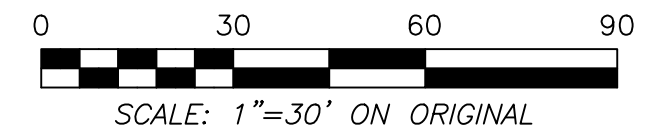

SILT FENCE NTS

PROPOSED TIES

	TBM(1)	TBM(2)
PRESBY CORNER-A	64.1'	42.6'
PRESBY CORNER-B	34.5'	60.7'

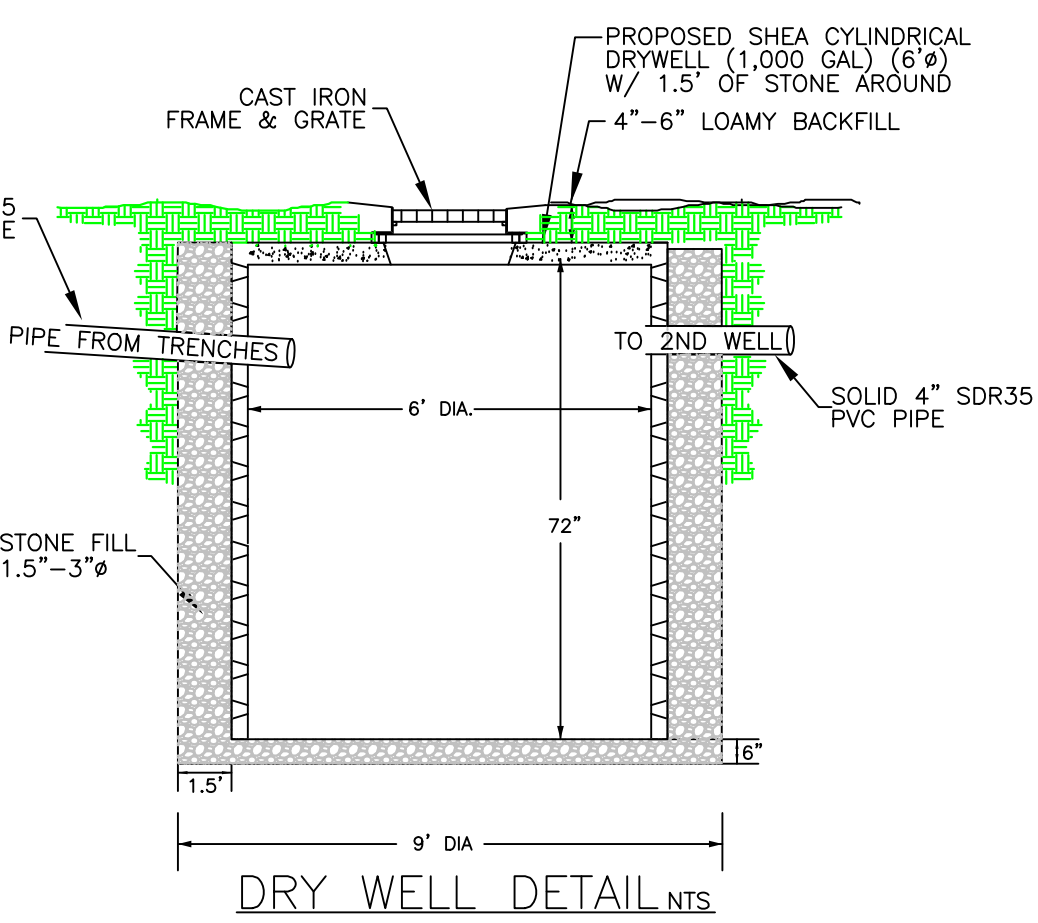

DRY WELL DETAIL NTS

NO.	DESCRIPTION	DATE	BY	DESIGNED BY	DRAWN BY	CHECKED BY	DATE	SCALE	JOB NUMBER	FIELD BOOK NO. PAGES
2	ADDED DRY WELLS & DRIVEWAY BERM	10/4/22	TWF	TWF	TWF	PFG	6/29/22	1"=30'	22103	SHEET 1 OF 1
1	ADDED SILT-FENCE AT LIMIT-OF-WORK	8/10/22	PFG							

PROPOSED SINGLE FAMILY SEPTIC SYSTEM
DESIGN & NOI PLAN
67 HILL STREET; WINCHENDON, MA
MAP-5C1 PARCEL-73
PREPARED FOR:
DAN BERTRAM

GRAZ Engineering, LLC
WWW.GRAZENGINEERING.COM
323 WEST LAKE RD.; FITZWILLIAM, NH 03447; (603) 585-6959